


Pulse Service Interface Box Connection

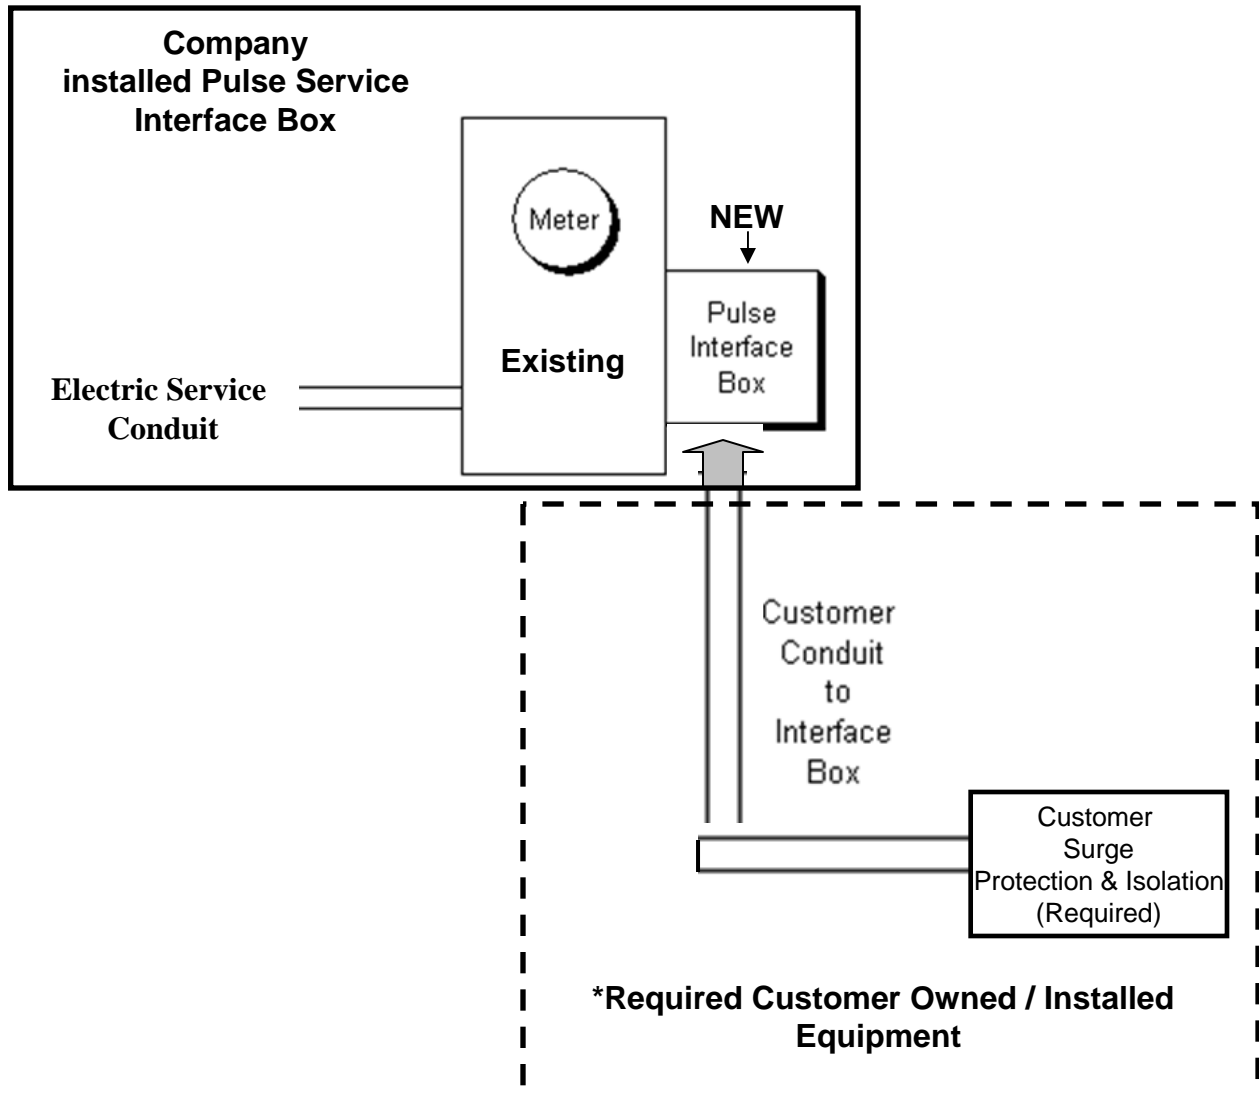

Company Supplied and Installed:

The Company will mount the Pulse Service Interface Box on Meter Base or adjacent to Meter Cabinet. The Pulse Service Interface Box location will be determined at time of installation and may vary from typical installation shown above. The Company to wire KYZ (Form C) pulse cable from Meter and terminate connections on terminals labeled KYZ IN on Pulse Service Interface Box.

The Company to verify pulse operation from meter at KYZ IN connection of Pulse Service Interface Box at time of installation. The Company to record KWC constant on Pulse Service Interface Box. Record both 2 Wire (Form A) and 3 Wire (Form C) values. The Company to identify KW and KVAR pulse connections when KW and KVAR pulses are requested.

Customer Supplied and Installed:

Customer to terminate conduit at bottom of Pulse Service Interface Box. A minimum of 12" of flexible conduit to be used at conduit termination into Pulse Service Interface Box. Weatherproof connections required for all outdoor locations. Customer to install two (Form A) or three (Form C) wires from monitoring equipment through customer conduit to Pulse Service Interface Box and terminate wires on terminals labeled KYZ OUT. Customer to provide isolation protection between customer monitoring equipment and Pulse Service Interface Box. Customer to provide appropriate surge protection and isolation for all installations.